


REXON DEA-GATE

BASIC CHARACTERISTIC

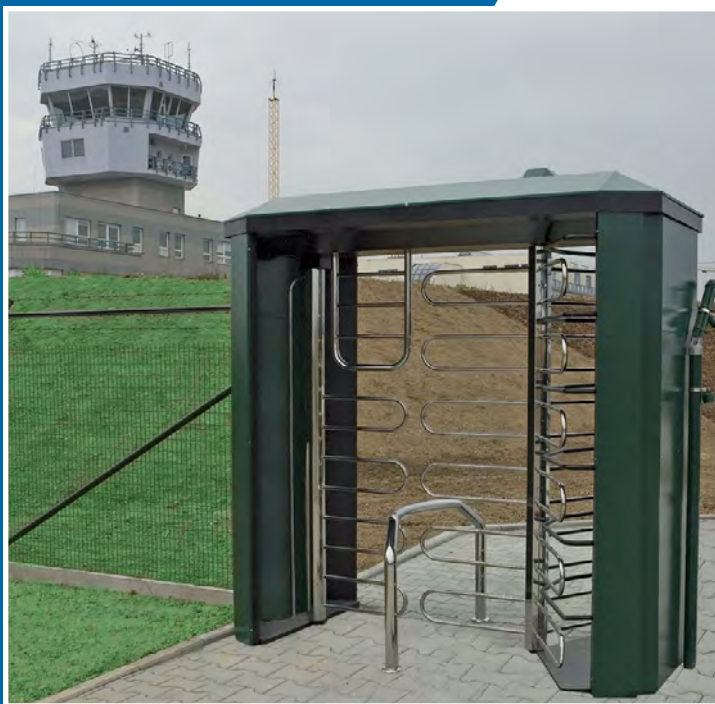

REXON-DEA-GATE turnstile is designed for the environments where it is necessary to secure entrance to the area but there still must be a way to take the bicycle in/out of the guarded zone. For this reason the turnstile is completed by gate with lowered passage. Robust full-height construction, high quality, trouble-free and simple operation are the features that make **REXON-DEA-GATE** turnstile to be the most effective solution for applications where maximum security and fully automated identification of passing persons are required. Anti-corrosive surface of all components and high quality final finish of **REXON-DEA-GATE** turnstile guarantee long durability and reliable operation especially in harsh and extreme conditions of outdoor installations. Modern design, constructive and colour variability make **REXON-DEA-GATE** turnstile to be a unique part of access control system.

REXON-DEA-GATE turnstile is a bi-directional turnstile with electronic

access control, the 120° openings ensure comfortable, easy and safe access for one person and in case of authorization it also ensure the person's passage with a bicycle through integrated gate. Modern control electronics enables easy setting of its turnstile operating mode and at the same time it ensures the communication with different types of identification and signalling devices. **REXON-DEA-GATE** is supplied with motor-driven unit that its silent and fluent operation provide high user's comfort.

Motor drive unit MT:

REXON-DEA-GATE turnstile motorized unit provides high comfort along with reliable and maintenance-free running:

- effective blocking system in combination with motor-driven unit
- automatically adapts the rotation speed to the users
- provides a high level of safety - in the event the turnstile detects an obstruction it will stop moving
- silent and fluent running
- possibility to set smooth final phase of rotation

Motor-driven unit is supplied in two variants:

- 1) **FAIL-LOCK:** turnstile is blocked during the power failure
- 2) **FAIL-SAFE:** turnstile is unblocked for free passage during the power failure

TURNSTILE MATERIALS AND SURFACE TREATMENT:

The turnstile is supplied in two variations according to the type of push bar:

REXON-DEA-GATE: rotor from stainless tube \varnothing 108mm with wings made by bars from stainless tube \varnothing 40mm (standard: polished)

REXON-DEA-GATE-U: assembled rotor covered with stainless steel sheet, thickness 1.2mm with wings made by trombone stainless tube \varnothing 22mm (standard: polished)

Frame: steel sheet, thickness 3mm, surface-finished by powder coating (standard: RAL 9005 GS-black)


Covers and roof: steel sheet, thickness 1,5mm, surface-finished by powder coating (standard:RAL 5010 GS-blue)

Top and roof sides: steel sheet, thickness 1,5 mm, surface-finished by powder coating (standard:RAL 9005 GS-black)



Internal barrier: steel tube \varnothing 22 mm (standard: RAL 9005 GS-black)

Internal guiding barrier: stainless tube \varnothing 60 mm (standard: polished)


Other mechanical parts of turnstile are finished by galvanic zincing or blackening.

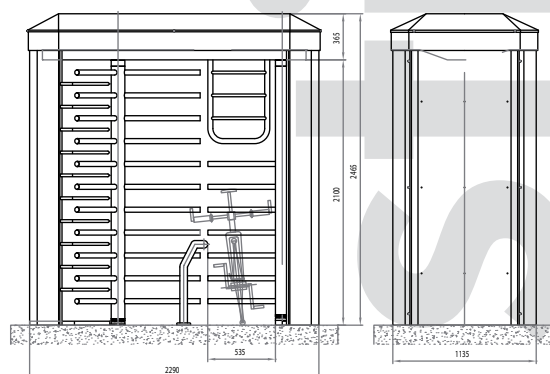

REXON-DEA-GATE

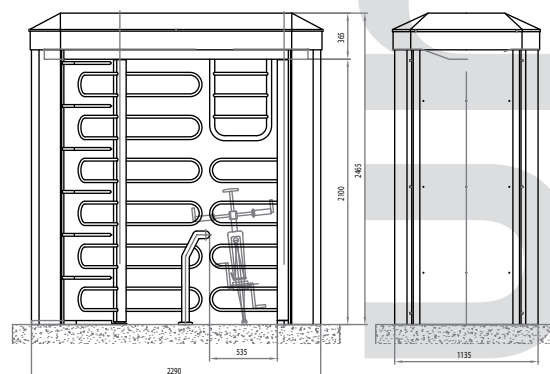

REXON-DEA-GATE-U



Interface:

Turnstiles are controlled by microprocessor control units that is equipped with high effective processor. Control electronics is equipped with extensive subsystem that enables the connection of many input and output devices, all of them are galvanically isolated.

- device operating by status signals, serial bus RS 485, USB or Ethernet (with external converter)
- configurable two-state outputs about turnstile status
- motor control by digital power bridges with overload protection and current measurement
- include generating log file with a list of all faults accompanied with time/date mark
- possibility of remote firmware upgrade
- wide range of configuration and diagnostics parameters for remote customization using T-CONF software
- full remote control of turnstile network including passage counters status shown on PC using T-MON program
- possibility to connect the supplementary ultrasonic, laser or infra-red sensors
- enables back up accumulator connection directly in the turnstile (supports charging, measuring and auto-switching for power supply from accumulator in case of power failure)
- connectors for all input/output signals for fast and easy installation, service and replacement
- top-quality control electronics enables high operational reliability

Operating modes:

If input signal from access control system or button controller is received it is possible to turn round the turnstile 120° and by that way enable the passing to one person.

For each way of direction it is possible to define the different operating modes:

1. free passage
2. controlled passage
3. permanently blocked

This setting can be set-up for any direction eventually for both directions at the same time.

BASIC TECHNICAL PARAMETERS

Table of drive unit electric parameters:

Type of drive unit	Rated supply voltage	Power consumption in basic operation modes		
		Standby mode break activated / break released		Transit mode
Motorised FAIL-LOCK	12VDC	6 W	25 W	60 W
Motorised FAIL-SAFE	12VDC	25 W	6 W	39 W

- standard range of working temperatures: +10°...+50°C
- range of working temperatures (with heating module) -25°... +50°C
- range of storage temperatures 0°... +50°C
- maximum relative humidity 80% (non-aggressive environment)
- MCBF: 3 000 000 cycles (number of cycles before error)

The number of passages, in dependence on type of control electronics, operating mode and the way of identification of passing people, rates between 15 to 30 persons per minute.

Increase of power supply on motor drive unit with automatic heating module is 24 W. The power supply can be also increased by using optional accessories.



ACCESSORIES

Additional locking:

Additional electromagnetic brake to increase the turnstile resistivity against illegal passage.

Columns and holders for accessories:

Columns and holders for placing of identification readers or other accessories (for example: LED information panel).

Lighting:

Lighting of turnstile interior.

Anchoring frame:

Steeley frame to fix the turnstile for example through the stone block paving.

Traffic-Light information panel:

- animation of identification card alarming necessary identification of the passing person
- information about the turnstile accessibility in set direction
- information about transit permission based on evaluation by access control system
- information about reading of invalid identification card

Touch control panel:

Remote manual control of the turnstile.

Back-up accumulator:

During a power failure the accumulator ensures the turnstile continuous operation for a period of minimally 6 hours. It is possible to use two backup modes.

- accumulator in external power supply unit (back up > 6 hours)
- accumulator inside the turnstile (emergency back up about 30 minutes in case of feed cables disconnection)

Counter:

- included in program T-MON
- it is possible to connect the external counter

Identification systems:

In order to identify the passing people, it is possible to connect to these turnstiles REXON-DEA-GATE any type of barcode, magnetic card, proximity chip card, smart card, biometrical sensor etc.

Software accessories:

COMMUNICATION CLIENT - software that enables the connection of turnstile network with PC. This program runs on the background (its activity is hidden) and enables to any PC with valid authority to make setting and control the turnstile network.

T-MON - program that enables to control the turnstile system from any PC with valid authorization in customer's network. Remote control of the same turnstile is possible from different PC at the same time. It is fully graphic application that can be used even with touchscreen monitors.

T-CONF - program that enables to change the turnstile configuration, configuration backup, record new configuration, error report and vypustit z textu firmware upgrade. It is localized to many world languages. It is possible remotely connect to any turnstile through Internet after fulfilment of all network qualifications.

Specific variants:

- stainless steel design
- RAL custom colour