



EasyGate IM

Type

Swing technology
1 wing / 2 wings
Square front

Safety & Security Detection

- 36 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

Dimensions

Cabinet height	995 mm	39.17"
Cabinet length	1 500 mm	59.10"
Cabinet width	210 mm	8.27"
Barrier height standard	995 mm	39.17"
Barrier height max.	1 800 mm	70.87"
Passage width standard ^[1]	650 mm	25.59"
Passage width max. ^[1]	1 050 mm	41.34"

Special features*

Heavy duty wing
Arc layout
Flag wing



EasyGate IM / 995 mm



EasyGate IM / 1 800 mm

* Optional [1] For 2 wings type



Materials and Colours

Inner covers	brushed stainless steel
Cladding	corian
Barriers	tempered glass barrier panels (10 mm / 0.39")

Operating Environment

Indoor

Drive Mechanism

Magnetic Direct Drive motor with external tooth brake
MCBF 25 000 000

Stand-by Power Consumption


6.1 W

Emergency Mode

Open automatically in the exit direction
Pushthrough feature*

Optional Accessories

RFID reader bracket (flush mounted)
Access Light / Lane Light / Wing Light
WAV player
Hinge capping
Pushthrough feature
RF remote control
EasyTouch / TouchPanel / T-MON SW
SuperCap (emergency power back-up)
Alternative surface finishes / Optional top finishes
Integration of LiftCall / Card collector / BarCode scanner
Ramp LT

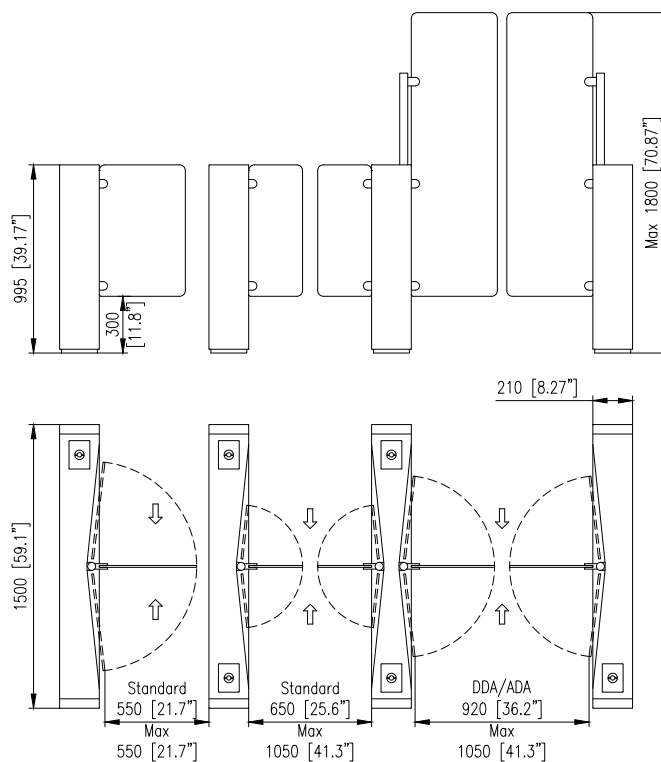

cominfo

By **GUNNEBO** Entrance Control