



EasyGate SPDs-G / SPDs-R

Type

Swing technology

1 wing / 2 wings

G model - round front

R model - square front

Safety & Security Detection

- 24 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

Dimensions

Cabinet height	990 mm	38.39"
Cabinet length	1 200 mm	47.24"
Cabinet width	180 mm	7.09"
Barrier height	855 mm	33.66"
Passage width standard ^[1]	650 mm	25.59"
Passage width max. ^[1]	920 mm	36.22"


Special features*

Wide passage lane SPDs ^[2] 921-1 050 mm 36.26"-41.34"


Heavy duty wing

Arc layout

Staggered / diagonal layout

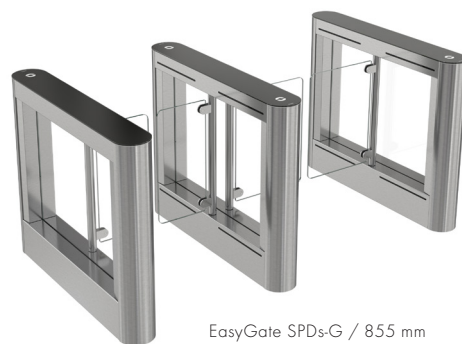

EasyGate SPDs-G / 855 mm

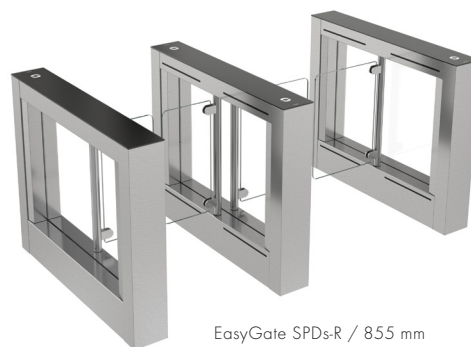


EasyGate SPDs-R / 855 mm

* Optional [1] For 2 wings type [2] Dual opening mode



Materials and Colours

Covers	brushed stainless steel
Top Lid	black glass
Barriers	tempered glass barrier panels (10 mm / 0.39")
Side infill panel	tempered glass panels (6 mm / 0.24")

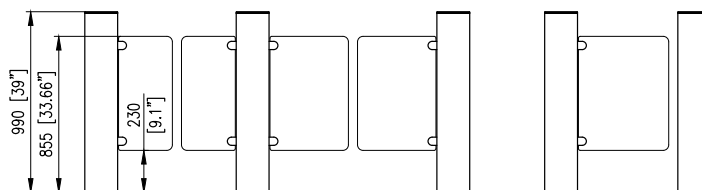

Operating Environment

Indoor

Drive Mechanism

Magnetic Direct Drive motor with external tooth brake
MCBF 25 000 000

Stand-by Power Consumption

6.1 W

Emergency Mode

Open automatically in the exit direction
Pushthrough feature*

Optional Accessories

RFID reader bracket (flush mounted)
Access Light / Lane Light / Edge Light / Wing light / Passage Light
WAV player
Hinge capping
Pushthrough feature / Pressure sensing top
EasyTouch / TouchPanel / T-MON SW / RF remote control
SuperCap (emergency power back-up)
Alternative surface finishes / Optional top finishes
Integration of LiftCall / Card collector / BarCode scanner
Ramp LT

