



# EasyGate SPT-G Outdoor / SPT-R Outdoor

## Type

Swing technology developed to withstand harsh outdoor conditions - IP 53

1 wing / 2 wings

G model - round front

R model - square front

## Safety & Security Detection

- 36 pairs of IR sensors
- Safety & Security levels
- Tailgating / Cross over detection

## Dimensions

Cabinet height	990 mm	39"
Cabinet length	1 500 mm	59.06"
Cabinet width	210 mm	8.30"
Barrier height standard	1 400 mm	55.12"
Barrier height max.	1 800 mm	70.87"
Passage width standard <sup>[1]</sup>	650 mm	25.59"
Passage width max. <sup>[1]</sup>	1 050 mm	41.34"

## Special features\*

Heavy duty wing




EasyGate SPT-R Outdoor  
1 400 mm



EasyGate SPT-G Outdoor  
1 800 mm

\* Optional [1] For 2 wings type

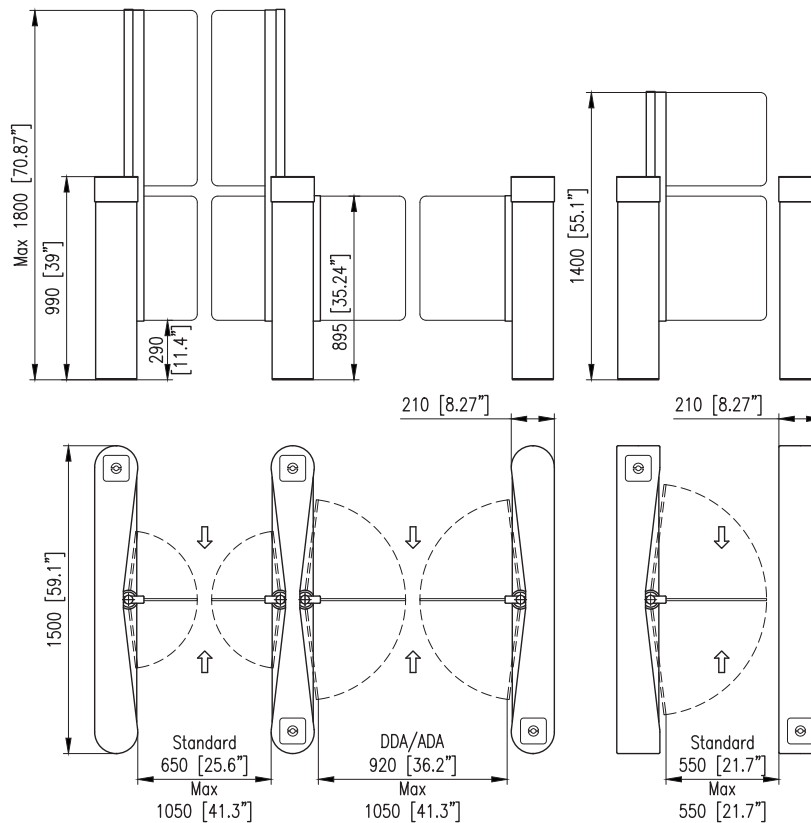

### Operating Environment

Outdoor - IP 53

### Drive Mechanism

Magnetic Direct Drive motor with external tooth brake  
MCBF 25 000 000

### Stand-by Power Consumption

6.1 W

### Emergency Mode

Open automatically in the exit direction  
Pushthrough feature\*

### Optional Accessories

RFID reader bracket (flush mounted)  
Access Light / Lane Light / Wing Light  
WAV player  
Hinge capping  
Pushthrough feature / Pressure sensing top  
RF remote control  
EasyTouch / TouchPanel / T-MON SW  
SuperCap (emergency power back-up)  
Alternative surface finishes  
Integration of Barcode and QR code scanner  
Ramp LT

### Materials and Colours

Covers	brushed stainless steel
Top Lid	stainless steel
Barriers	tempered glass barrier panels (10 mm / 0.39")
Side infill panel	tempered glass panels (6 mm / 0.24")



**cominfo**

By **GUNNEBO** Entrance Control