



EasyGate SPTs-G / SPTs-R

Type

Swing technology

1 wing / 2 wings

SPTs-G model - round front


SPTs-R model - square front

Safety & Security Detection

24 pairs of IR sensors

Safety & Security levels

Tailgating / Cross over detection

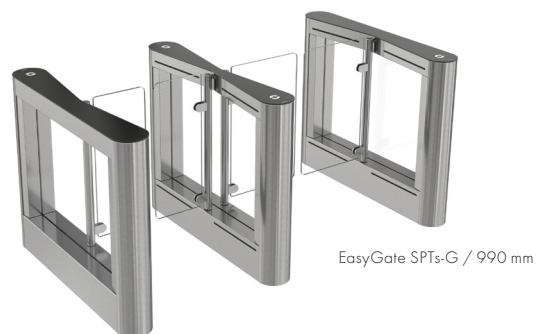

EasyGate SPTs-G / 990 mm

Dimensions

Cabinet height	990 mm	38.39"
Cabinet length	1 200 mm	47.24"
Barrier height standard	990 mm	38.98"
Barrier height max.	1 800 mm	70.87"
Passage width standard ^[1]	650 mm	25.59"
Passage width max. ^[1]	920 mm	36.22"

Special features*

Wide passage lane^[2] 921-1 050 mm 36.26 - 41.34"

Extra wide passage lane^[3] 1 201-1 400 mm 47.28 - 55.12"

Heavy duty wing

Arc layout


Staggered / diagonal layout

Flag wing



EasyGate SPTs-R / 1 800 mm

* Optional [1] For 2 wings type [2] Dual opening mode [3] Cabinet length extended & Dual opening mode

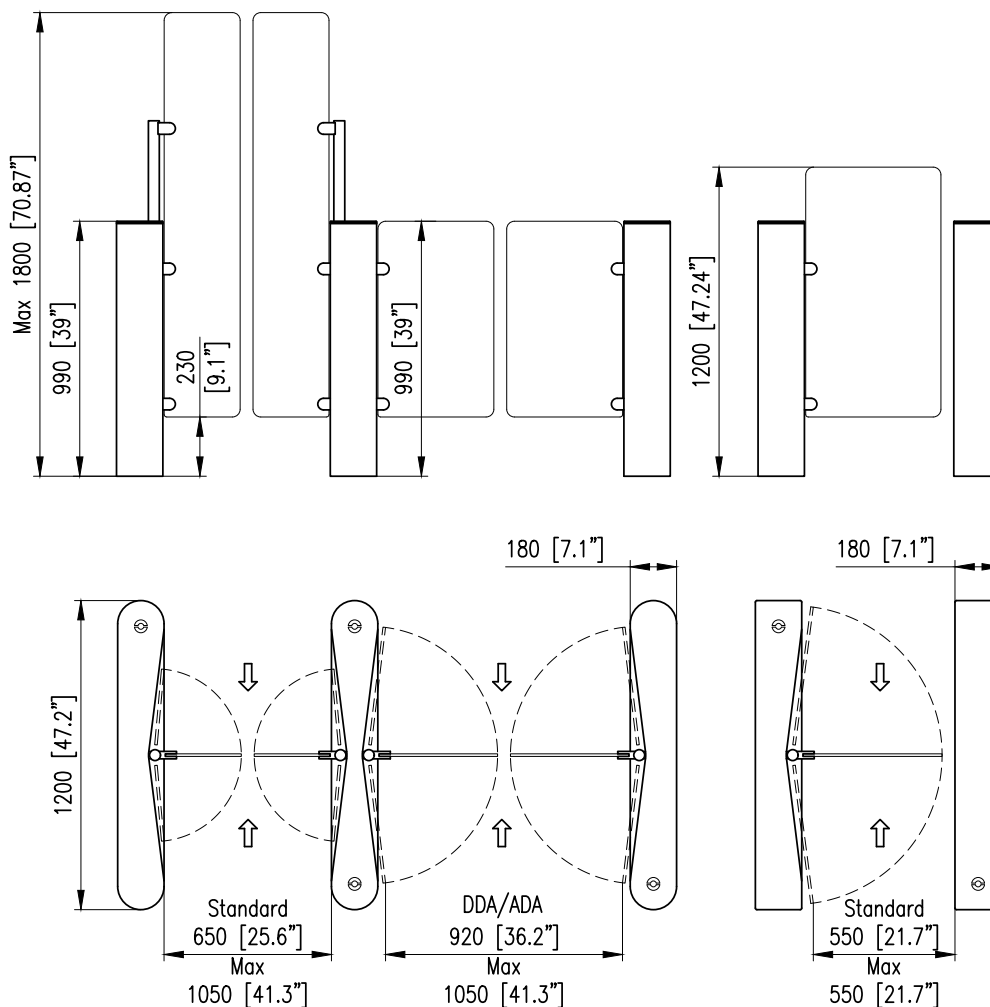

Operating Environment

Indoor

Drive Mechanism

Magnetic Direct Drive motor with external tooth brake
MCBF 25 000 000

Stand-by Power Consumption

6.1 W

Emergency Mode

Open automatically in the exit direction
Pushthrough feature*

Optional Accessories

RFID reader bracket (flush mounted)
Access Light / Lane Light / Edge Light / Wing Light / Passage Light
WAV player
Hinge capping
Pushthrough feature / Pressure sensing top
RF remote control
EasyTouch / TouchPanel / T-MON SW / RF remote control
SuperCap (emergency power back-up)
Alternative surface finishes / Optional top finishes
Integration of LiftCall / Card collector / BarCode scanner
Ramp LT

Material and Colours

Covers	brushed stainless steel
Top Lid	black glass
Barriers	tempered glass barrier panels (10 mm / 0.39")
Side infill panel	tempered glass panels (6 mm / 0.24")

